



Meeting room solution JAR101Part#CT128



Software features


- Integrate with Office 365, Gsuite or exchange.
- Manage all meeting rooms of your facilities in different locations.
- If this feature is activated, the meeting organizer should check-in on time to keep the room. In case the check-in is not realized the room will automatically drop to available status for all others. Eliminate unduly room occupation with this feature.
- Tracking from All Devices You don't have to be in front of your desk and plan your day. You can arrange and track your meetings from any device such as your PCs, touch screens, kiosks and mobile devices whatever is convenient for you. We reveal all choices in front of you.
- Central Management Manage all meeting rooms of your facilities in different locations
- Hospitable Rooms, Fruitful Meetings Put your request or feedbacks through the system and forward to the related department.


JAR101Part#CT128

Specification		JAR101Part#CT128	
Screen size		10″	
Panel info. Resolution		1280 × 800	
	Brightness	350 cd/m2	
	Contrast	800:1	
	Aspect Ratio	16:10	
	Active Display Area	134.8x216.2	
Viewing angle		H170°/ V170°	
	Touch Tech.	5point cap touch	
		(6H semi-tempered glass)	
Hardware &OS	CPU	RK3128 CortexA7,	
		Quad core	
		1.2 GHz	
	RAM	1GB DDR3	
	ROM	8GB eMMC Flash	
	OS	Android 7.1	
Video/ Image	Video format	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, HTML5, Flash 10	
	Audio format	MP3/ WMA/ AAC etc.	
	Image format	JPEG, BMP, PNG	
Audio	Speaker	2 x 1W	
Communication	Bluetooth	EDR 4.0	
	Wi-Fi	802.11 b/g/n	
	Ethernet	10/100 LAN	
General	Color	Black	
information	Ι/Ο	RJ45 x 1;USB x 3; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1	
	POE	Yes	
	Included in Box	Instore POS series tablet, Power Adaptor, Power cable	
	Sensors	G-sensor	
	Power input	12V 2A	
	Operating Environment	Operating: 32°F to 104°F (0°C to 40°C); Storage: -4°F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage: 10%-95%	
	Certification	CE, FCC, ROHS	
	Language	Multi language	
	VESA	VESA 75	
Dimension	Dimension		
	(L x W x H)	250 × 28×172 mm	
	Weight	660g	
	Box size/each PCs (L x W x H)	385 x 65x222 mm	
	Master Box size (L x W x H)	470×400×355 mm	
	Master Box weight	13.7Kg	
	Pieces/Carton	10 PCS	

Demo Account

http://rm.platplay.com/ web UI login pin: 2341 user:glorystar password: Dscn1325

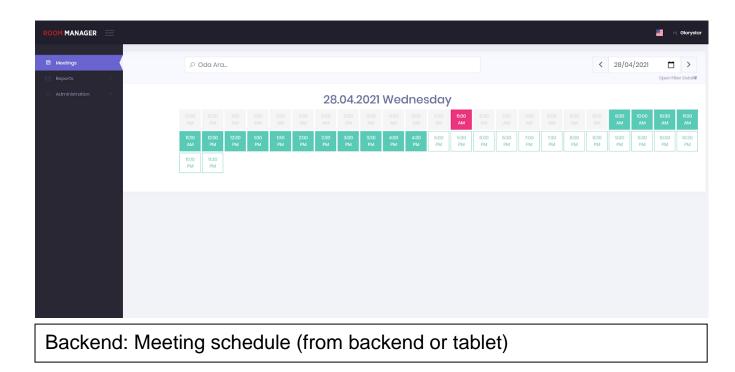

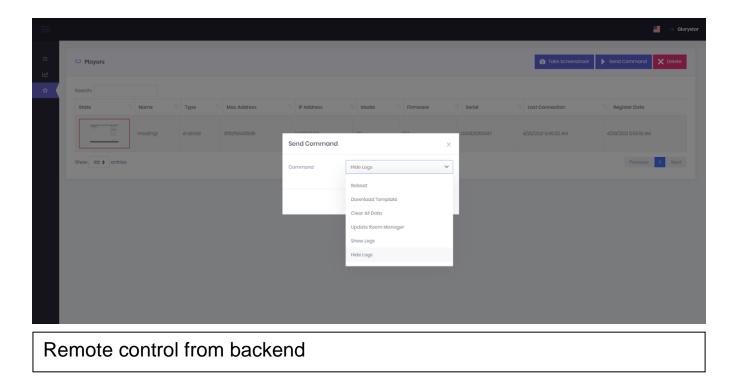

=				📕 H, Glorystar
	Settings			+ sove
₩.				
*		Entegration Settings:		
		Entegration Type	Exchange Server 🗸	
		Exchange Host Url	smtp.gmail.com	
		Exchange UserName	odword@giorystargroup.com	
		Exchange Password		
			Test Exchange Server Connection	
		Users Entegration:		
			Use Active Directory	
			Users will be imported from Active Directory	
		LDAP Query String	smtp.gmail.com	
		LDAP UserName	edward@glorystargroup.com	
		LDAP Password		

To find out more about our extensive range of Glorystar solutions, go to <u>www.glorystargroup.com</u>, or call the office nearest you.For more information, please contact us at <u>sales@glorystargroup.com</u>. Glorystar reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glorystar, the Glorystar logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glorystar Group Limited. All other trademarks are the property of their respective owners.