



GLORystAR

VEGA

Indoor In-wall Touchscreen



Dual Microphone
Supports POE



Support Gang Box compatible
In US, UK, USA Electrical
Standard



Echo Cancellation Mic

Features:

Dual Microphone - Enhanced noise canceling, echo and noise canceling

Supports Gang Box - Compatible with electrical standards in USA, UK & Europe

Loudspeaker - 2 x 3W loudspeaker for intercom


POE Supported

Elegant design that seamlessly blends into high-end buildings

Supports VEGA OS / StarOS - Intercom and kiosk lockdown software

Support Third Party Apps

Supports STAR CONTROL Remote MDM

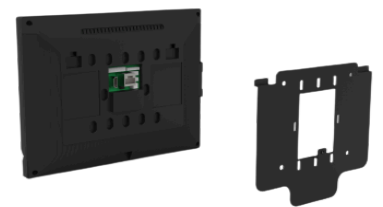

	Model	VID101 Part#CT133
Screen Size	Size	10"
Panel Info	Resolution	1280 x 800
	Brightness	250cdm2
	Contrast	800:1
	Aspect Ratio	16:9
	Active Display Area	216.576*135.36MM
	Viewing Angle	85/85/85/85
	Response time	35ms
Touch Data	Touch Tech	G+G 10 Points Capacitive Touch
	Hardness Of Surface	≥ 6H
	Touch method	Finger touch , Capacitive stylus
	Transparency	≥86%
Hardware & OS	Touch Glass Thickness	2.9mm
	Bonded Panel	Yes
	CPU	Quad Core ARM A53@1.5GHz
	RAM	2GB
	ROM	16GB
Software	OS	Android 11
	Storage	Support Micro SD
	STAROS	License Free Kiosk Mode Lockdown
Video/ Image	STAR CONTROL	Remote Mobile Device Management
	STARTOOL	License Free Open Source API
	Video Format	H.265, VP8, RV, WMV, AVS, H.263, Mpeg4, Up to 4K x 2K decoding, HTML5, Flash 10
Audio	Audio Format	MP3, WMA, AAC, etc.
	Image Format	JPEG, BMP, PNG
Communication	Speaker	Dual Speaker at 3W x 2
	Camera	2MP
WIFI	Bluetooth	5.0
	Mic	Dual Microphone for Echo Cancelation
General	WIFI	802.11 b/g/n 2.4GHz and 5GHz
	Ethernet	1 x RJ45 10/100Mbps adaptive POE, 802.3af
	Color	Grey + Black
	Chassis	Plastic
	I/O	RS485 x 1, Relay x 2, USB x 1, DC in x 1, Alarm input x 8, Bell in x 1
	POE	Yes
	Included in Box	VID101 Vega Indoor Touchscreen and Gang Mount
Sensors	Proximity Sensor, Ambient Sensor, and Gyroscope	
Power Input	POE	
Operating Environment	Working Temperature: 0-45 degree celsius	
Mounting	Language	Multi Language
Lights	Mounting	Wall Mount
Dimensions	Light Control	RGB Light
	Dimensions (LxWXH)	252.8 x 200 x 29mm
	Weight	0.8kgs (without Mount) 1kgs (Touch Screen and Mount)
	Box size / pcs (LxWXH)	393 x 72 x 228 mm
	Box Weight	1.3kgs
	Master Box (LXWXH)	470 x 400 x 355 mm
	Master Box Weight	14kgs
Pieces/ Carton	10pcs	

CONTACT US

United States

101 Hudson St., 21st Floor
Jersey City, NJ 07302 USA
626 228 5927

Hong Kong

Flat D, 5/F, Excelsior Building,
364 Nathan Road,
Kowloon, Hong Kong
852 23762803

ShenZhen

Bldg. 9, 4/F Zhong Yuntai Technology Industrial
Park, Tangtou No.1 Road, Shiyan Street, Baoan,
ShenZhen, PRC
86 755 2600 1808

To find out more about our extensive range of Glory Star solutions, go to www.glorystargroup.com, or call the office nearest you. For more information, please contact us at sales@glorystargroup.com. Glory Star reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glory Star, the Glory Star logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glory Star Group Limited. All other trademarks are the property of their respective owners.